



RESISTOR

6" | COMPOSITE SAFETY TOE

TB091661214



FEATURES:

- Seam-sealed waterproof leather upper
- Composite toe
- Tri-density outsole and midsole
- Padded top collar
- Mesh Lining with Antimicrobial treatment
- Direct Inject construction
- Fiberglass shank
- Non-metallic puncture plate
- Brass eyelets with dual purpose to hooks
- Weight 9M 906g

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE:

- Slip resistant
- Oil resistant per SATRA TM63
- Heat Resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Abrasion resistant
- Non Marking

DYNAMIC ANTI-FAIGUE TECHNOLOGY POLYURETHANE FOOTBED:

- Durable: resists compression set over time
- Resilient: recovers for next foot strike
- Mono-sided inverted Anti-Fatigue Technology cones
- Contoured bio-mechanically engineered top surface helps maintain proper gait
- Dynamic arch adapts to different foot shapes for maximum comfort
- Moisture-wicking open-cell top cover

3.5-12 13 14 15 MW

USA M	3	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	13	14	15	
USA W	4.5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12							
United	2	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	
Europe	34.5	36	36.5	37	37.5	38	38.5	39	40	41	41.5	42	42.5	43	43.5	44	45	46	47	48	49	
Centir	21,5	22,5	23,0	23,5	24,0	24,0	25,0	25,0	26,0	26,0	26,5	27,0	27,5	28,0	28,5	29,0	29,5	30,0	31,0	32,0	33,0	



RESISTOR

6" | COMPOSITE SAFETY TOE

TB091661214



- A. Composite Safety Toe
- B. Anti-Fatigue Technology PU Footbed
- C. Non-Metallic Shank
- D. Non-Metallic Puncture-Resistant Plate
- E. Lightweight, Cushioning PU Midsole
- F. All-Weather TPU Outsole

- ☑ A. Embout coqué en composite
 - ☑ B. Semelle intérieure en PUR amortissante
 - ☑ C. Tige non métallique
 - ☑ D. Plaque résistante aux perforations non métallique
 - ☑ E. Semelle intercalaire en PUR légère et coussinée
 - ☑ F. Semelle extérieure en TPUR toutes saisons
-
- ☑ A. Punta de seguridad compuesta
 - ☑ B. Plantilla de PU con tecnología anti-fatigue
 - ☑ C. Cambrellón no metálico
 - ☑ D. Placa no metálica resistente a perforaciones
 - ☑ E. Entresuela ligera, acolchonada de PU
 - ☑ F. Suela de TPU para todos los climas

MEASUREMENTS:


(All measurements are external)

HIGHEST POINT ON COLLAR: 7 1/2"

LOWEST POINT ON COLLAR: 6 3/4"

LOWEST OPENING ON BOOT: 5 1/2"

HEEL BREAST: 1/2"

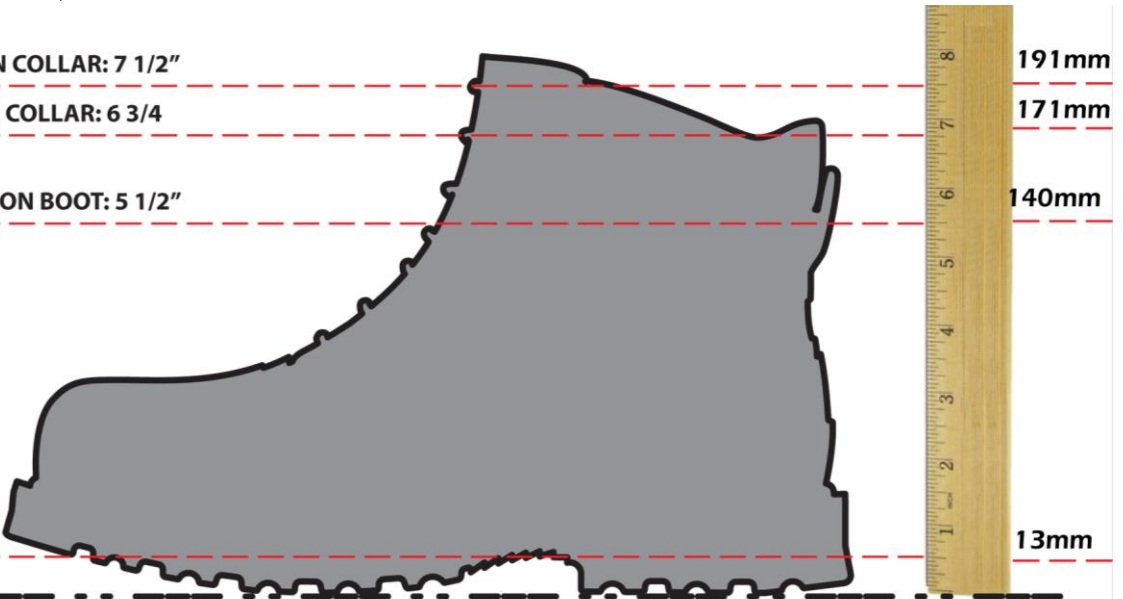



RESISTOR

6" | COMPOSITE SAFETY TOE

TB091661214

SLIP TEST RATING



No shoe is "slip proof." Footwear is one small part of any Slip Hazard Assessment Defense Program. You should always consult with your Company Safety Manager to determine the most appropriate footwear for your work environment. Using this information, it is possible to seek advice from the Manufacturer or Distributor regarding appropriate application based on test results.

EXCERPT FROM ASTM F2913-11

WHOLE SHOE SLIP RESULTS


TEST REPORT: CHT0247978

OUTSOLE: PRO280 TEST LAB: 12A10

The below chart provides the slip scores for the outsole of the shoe.

- HEEL / TALON / TALÓN
- FOREFOOT / L'AVANT-PIED / PARTE DELANTERA DEL PIE
- MINIMUM REQUIRED / MINIMUM REQUIS / MÍNIMO REQUERIDO

ASTM F2913-11

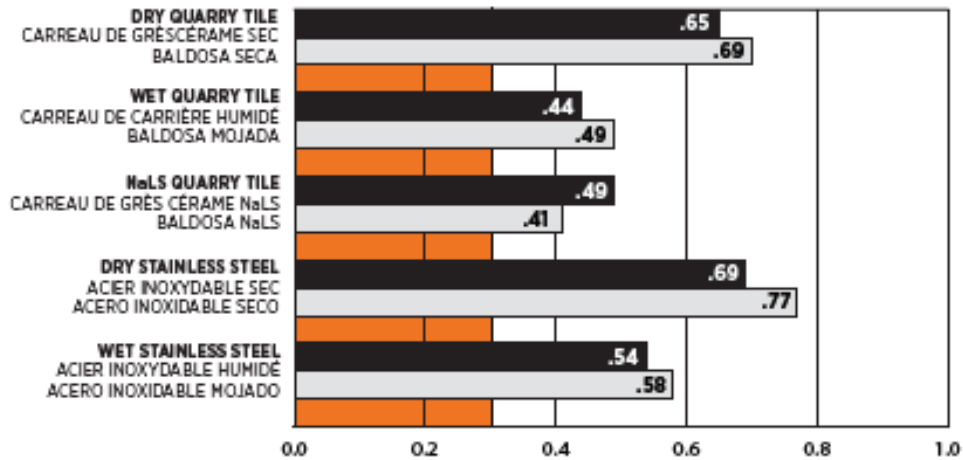

RESISTOR

6" | COMPOSITE SAFETY TOE

TB091661214

TECHNOLOGIES



Composite Safety Toe

Lightweight, non-metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



Waterproof Seam-Sealed

Seam-sealed waterproof leather for durable waterproof protection. Special tanning repels moisture for waterproof protection.



Electrical Hazard Protection

Provides secondary underfoot protection against live electrical circuits, electrically energized conductors, parts or apparatus. Meets ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 standards.



Puncture Resistant

Flexible non-metallic plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



All-Weather TPU Outsole

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



Antimicrobial Odor Control

Treatment to help prevent and control odors.



Anti-Fatigue Technology

A comfort system designed with shock-absorbing, geometrical technology that returns energy back to the foot to deliver all-day support and comfort.